




# SERVICE MANUAL / PARTS LIST

## TIPPING CLAMP 114622

## CONTENTS:

### PAGE

1	Lift Truck Requirements General Installation Procedures General Inspection
2-3	Clamp Assembly
4	Carriage Assembly
5-7	Hydraulic Assembly
8	Clamp Cylinder Assembly
9-10	Carriage Cylinder Assembly
11	Clamp Valve Assembly
12	Adjusting Relief Pressure Adjusting System Pressure Adjusting By-Pass Pressure
13	Arm Slide & Shim Replacement
14	Troubleshooting Guide

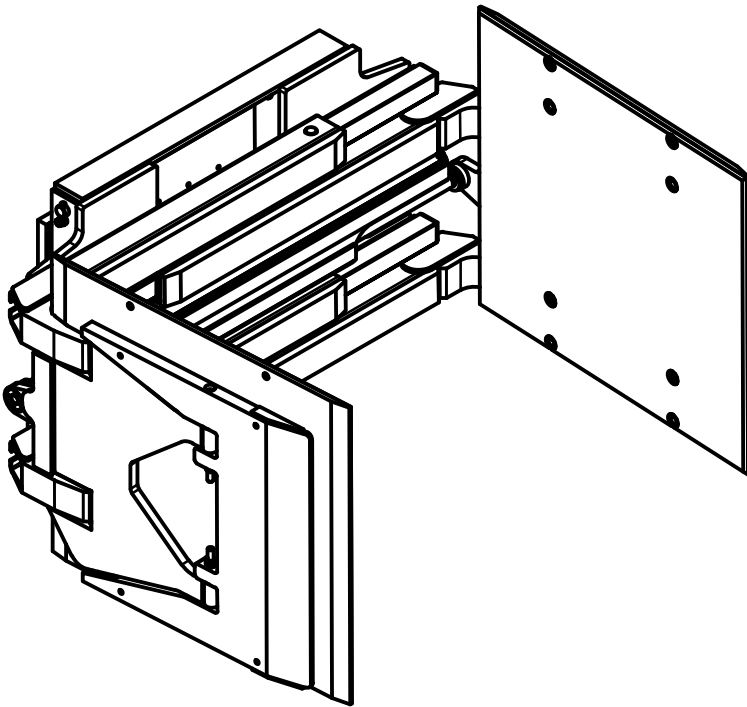

### Specifications:

Mounting: Class II  
Capacity: 1500 lbs at 24"  
Pad Size: 30" High x 34" Long  
Range: 23.3" - 82"  
Frame: 45" Wide  
Solenoid: 36V  
Rotation: 90° Forward

425 Hazel St.  
Kelso WA 98626  
(800) 248-6079  
Fax (360) 578-9934

---

---

# LIFT TRUCK REQUIREMENTS

---

## CAPACITY

Capacity shown on the clamp's name plate is for the clamp only. The combined truck and clamp capacity is provided by the lift truck manufacturer.

## CLAMP HYDRAULICS

**Recommended Truck Pressure:** 2000 PSI (140 bar)  
**Oil volume:** 6-10 GPM (22.5 to 38 l/min)  
**Hydraulic fluid:** petroleum based hydraulic fluid only  
**Hydraulic supply group:** includes hoses and take-up - one set for each function  
**Auxiliary valve:**  
2 Function (Side Shift & Clamp) = double auxiliary valve


---

---

## GENERAL INSTALLATION PROCEDURES

---

1. Make sure the attachment's centering lug is correctly seated in truck carriage center notch.
2. Clearance between the lower retainers that hold the attachment to the truck's lower carriage bar should be as shown below.

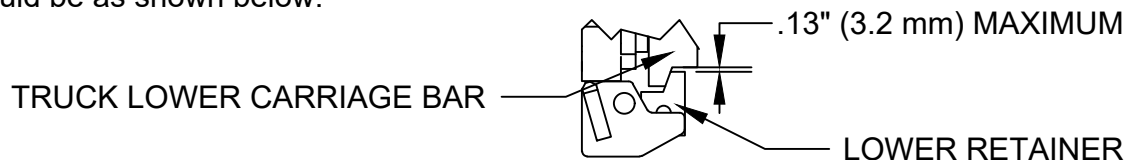

3. Connect hydraulic jumper hoses from the truck's supply group to the solenoid and bulkhead fittings.
4. Standing clear of the clamp attachment, cycle the attachment open and close several times to distribute the hydraulic oil. Use caution because partially filled hydraulic lines may cause erratic movement.

---

---

## GENERAL INSPECTION


---

1. Check all hydraulic fittings, hoses, cylinders and valves for leakage. Repair or replace as required
2. Check hoses for pinch points and signs of wear. Replace worn hoses with LORON hose or Parker 560TJ hose (wire reinforced hose only).
3. All bolts should be checked and tightened as required.
4. Check lower retainer clearance referenced in item 2 of the General Installation Procedures above. A shim may be tack-welded to the bottom of the lower retainers to tighten the clearance if necessary.

# CLAMP ASSEMBLY - 1

Drawing Reference: 114231


#	QTY	PART #	DESCRIPTION
1	1	114219	Frame Weldment REF
2	2	100954.39	Pad
3	1	111936.9	RH Arm
4	1	111935.9	LH Arm
5	2	101251.41	Cylinder Assembly
6	1	101917.8	Front Cover
7	8	111621.3	Angle Slide
8	4	114576.3	Flat Slide
9	8	103340.1	Shim
19	12	111619	Slide Button

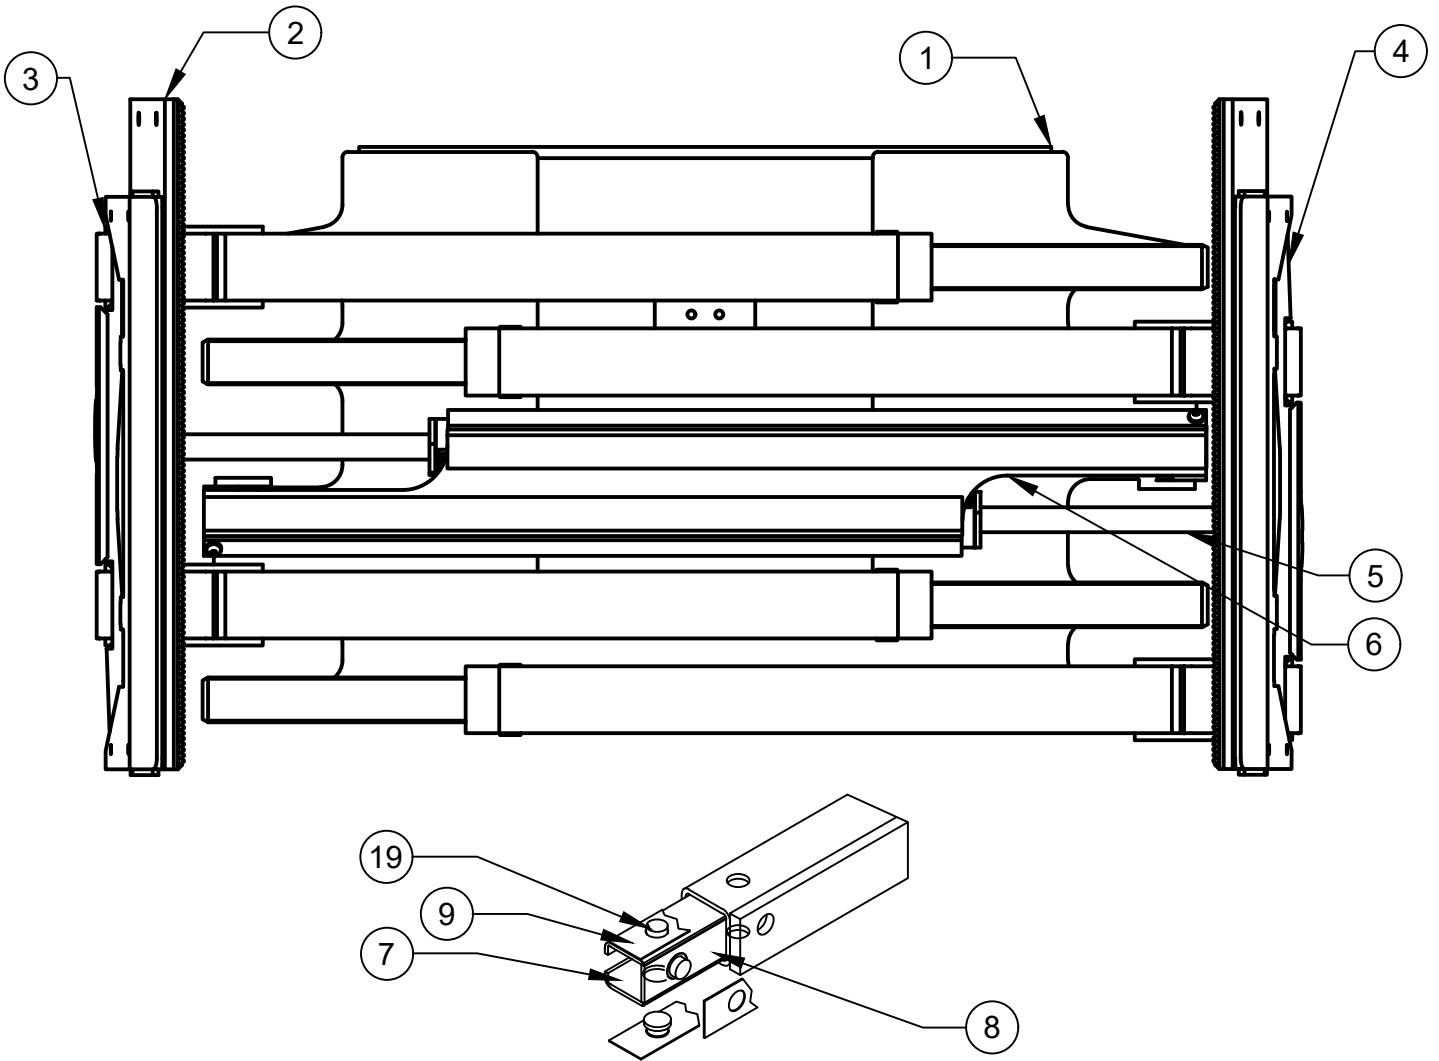

# CLAMP ASSEMBLY - 2

Drawing Reference: 114231


#	QTY	PART #	DESCRIPTION
10	4	100047	Cylinder Washer
11	4	110730	Spherical Bearing
12	4	110731	Slotted Nut
13	4	100574.86	Cotter Pin
14	4	11G.08136	Socket Head Bolt
15	4	17D.08	ESNA Nut LSP
16	2	109874.13	Pad Support
17	8	1C.0820	Hex HD Bolt LSP
18	8	108088	Spring Washer
20	2	25G.0612	Button Head Bolt LSP
21	2	4E.06	Lockwasher LSP
22	4	100029.314	O-Ring LSP

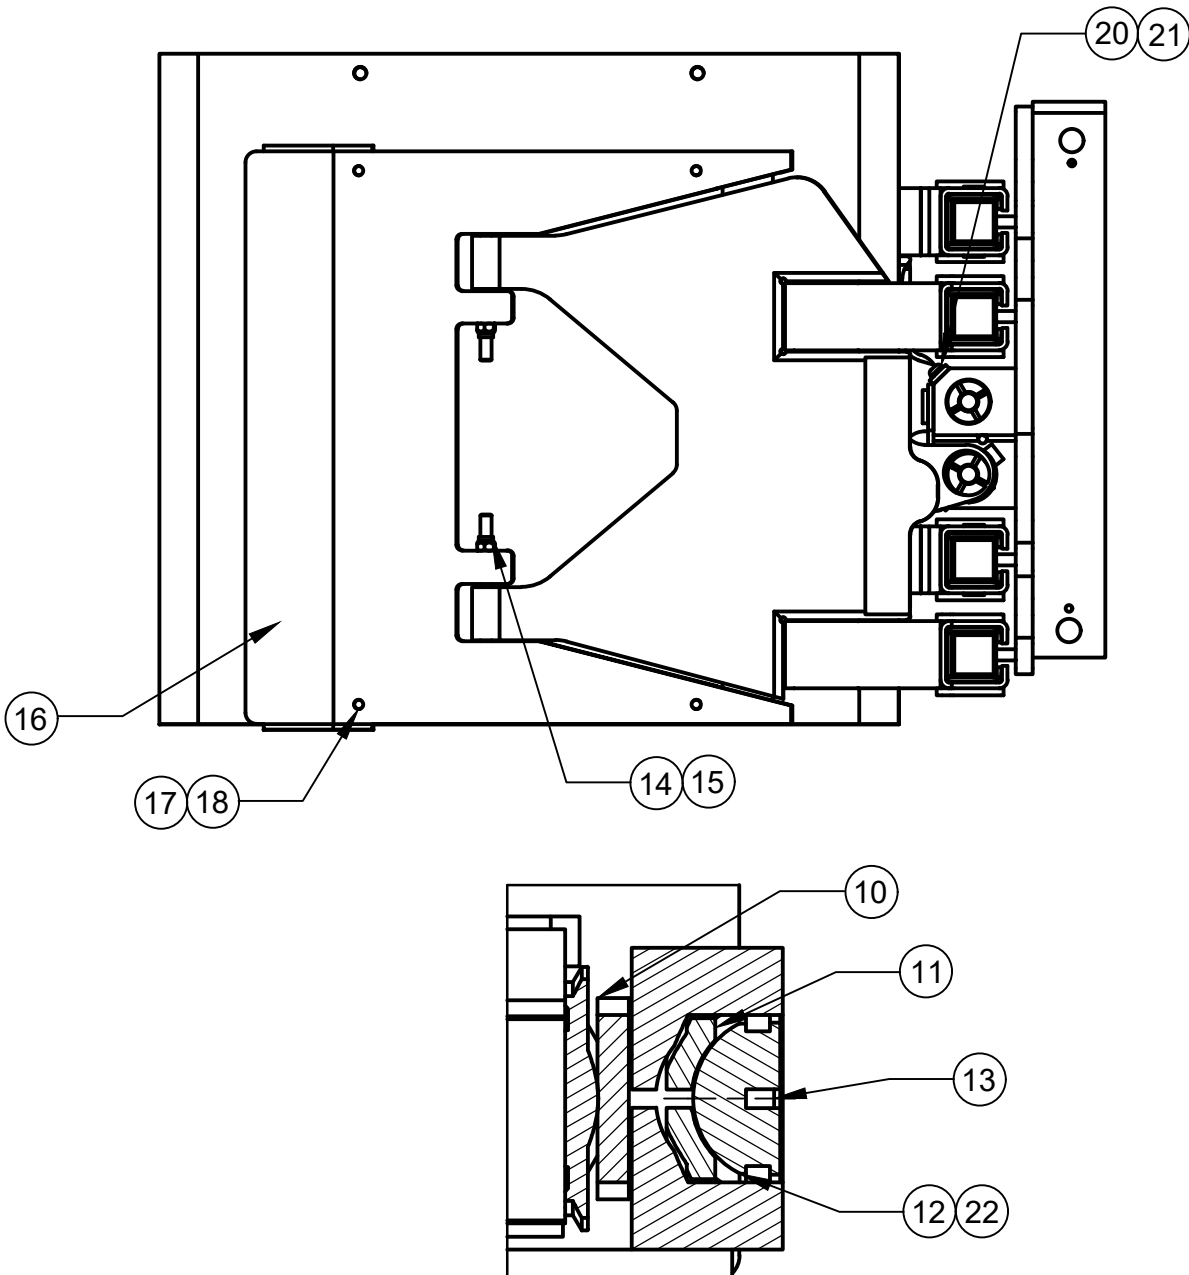

# CARRIAGE ASSEMBLY

Drawing Reference: 114679

#	QTY	PART #	DESCRIPTION	7	2	100663.5	Chrome Pin
1	1	114702	Base Carriage Weldment	8	6	1C.0616	Hex Head Bolt
2	1	114219	Front Carriage Weldment	9	6	4E.06	Lock Washer
3	2	107870	QD Lower Retainer	10	6	101294.5	Lock Pin
4	1	114220	Right Cylinder Assembly	11	2	11G.08136	Socket Head Bolt
5	1	114221	Left Cylinder Assembly	12	2	17D.08	ESNA Nut
6	4	100663.14	Chrome Pin	13	4	100785.2	Bushing

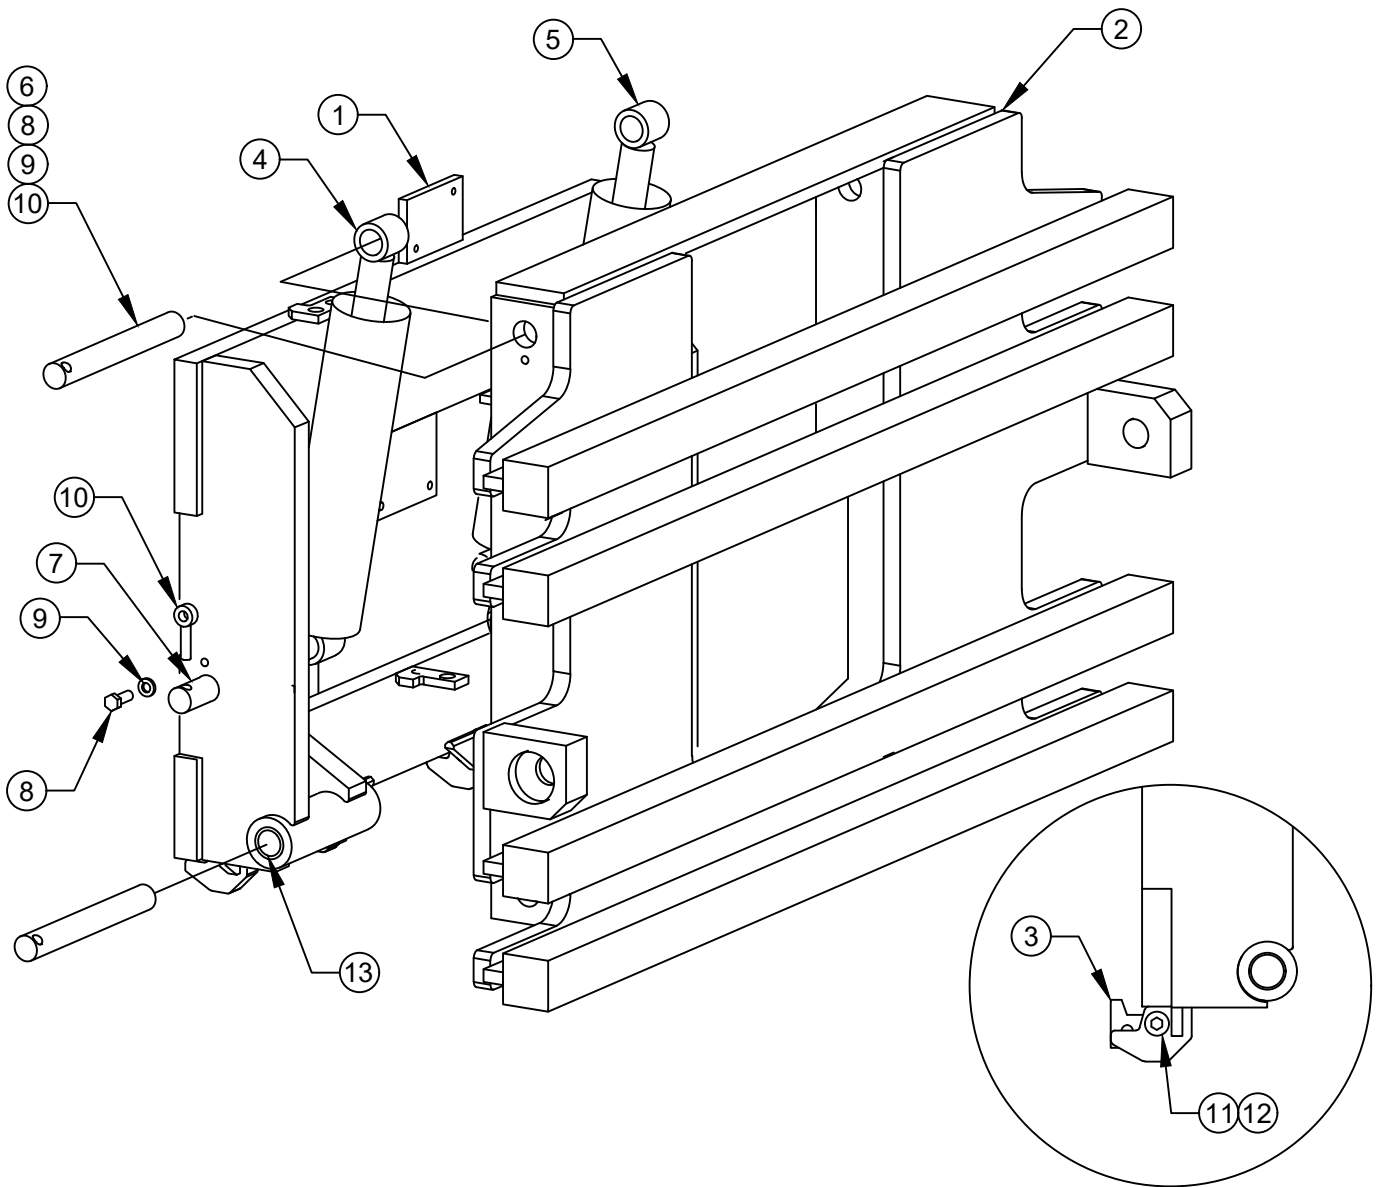

PARTIAL SIDE VIEW  
LOWER RETAINERS

---

---

# HYDRAULIC ASSEMBLY - 1



---

Drawing Reference: 114232.1

#	QTY	PART #	DESCRIPTION
1	1	100841	Solenoid Valve 36V
2	2	1C.0448	Bolt Hex HD
3	2	4E.04	Lockwasher
4	10	100095.05	90° Elbow
5	1	114240	Hydraulic Tube Assm 6-6
6	1	114241	Hydraulic Tube Assm 6-6
7	1	114237	Hydraulic Tube Assm 6-6
8	1	114236	Hydraulic Tube Assm 6-6
9	2	100233.0290	Hose Assm 6-4-6
10	2	100678.05	Branch Tee
11	2	100223.0230	Hose Assembly 6-4-6
12	1	100674.0340	Hose Assembly 6-6
13	1	100674.0335	Hose Assembly 6-6
14	2	100095.051	90° Elbow 8-6
15	2	100676.051	Straight Thread Adapter 8-6
16	1	114101	Dual Counterbalance Valve
17	2	1C.0632	Bolt Hex HD LSP
18	2	4E.06	Lockwasher LSP
19	6	100744.05	Bulkhead Fitting LSP
20	1	114238	Hydraulic Tube Assm 6-6
21	1	114239	Hydraulic Tube Assm 6-6
22	2	100674.0270	Hose Assembly 6-6 LSP
23	10	100676.05	Straight Thread Adapter
24	1	100238.05	Swivel Nut 45°
25	12	113622	Flare Seal
26	1	100674.0220	Hose Assembly 6-6
27	1	100674.0190	Hose Assembly 6-6
28	1	100674.0150	Hose Assembly 6-6
29	1	100674.0270	Hose Assembly 6-6
30	1	100011	Valve - Side Shifting
31	2	25GN.0516	Nylock Button Head Bolt
32	5	100440.05	Swivel Nut Elbow


# HYDRAULIC ASSEMBLY - 2

Drawing Reference: 114232.1

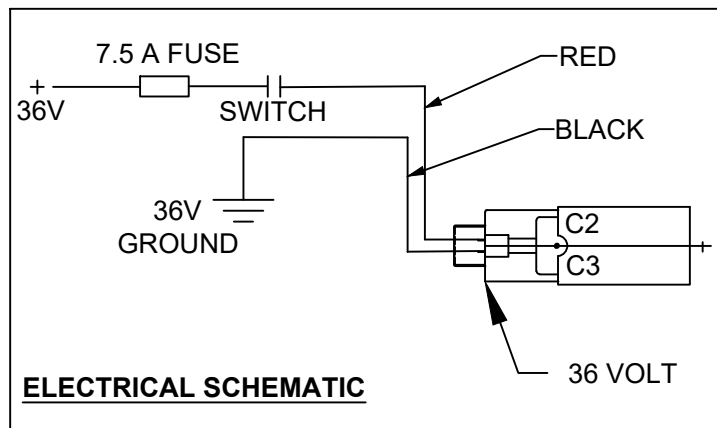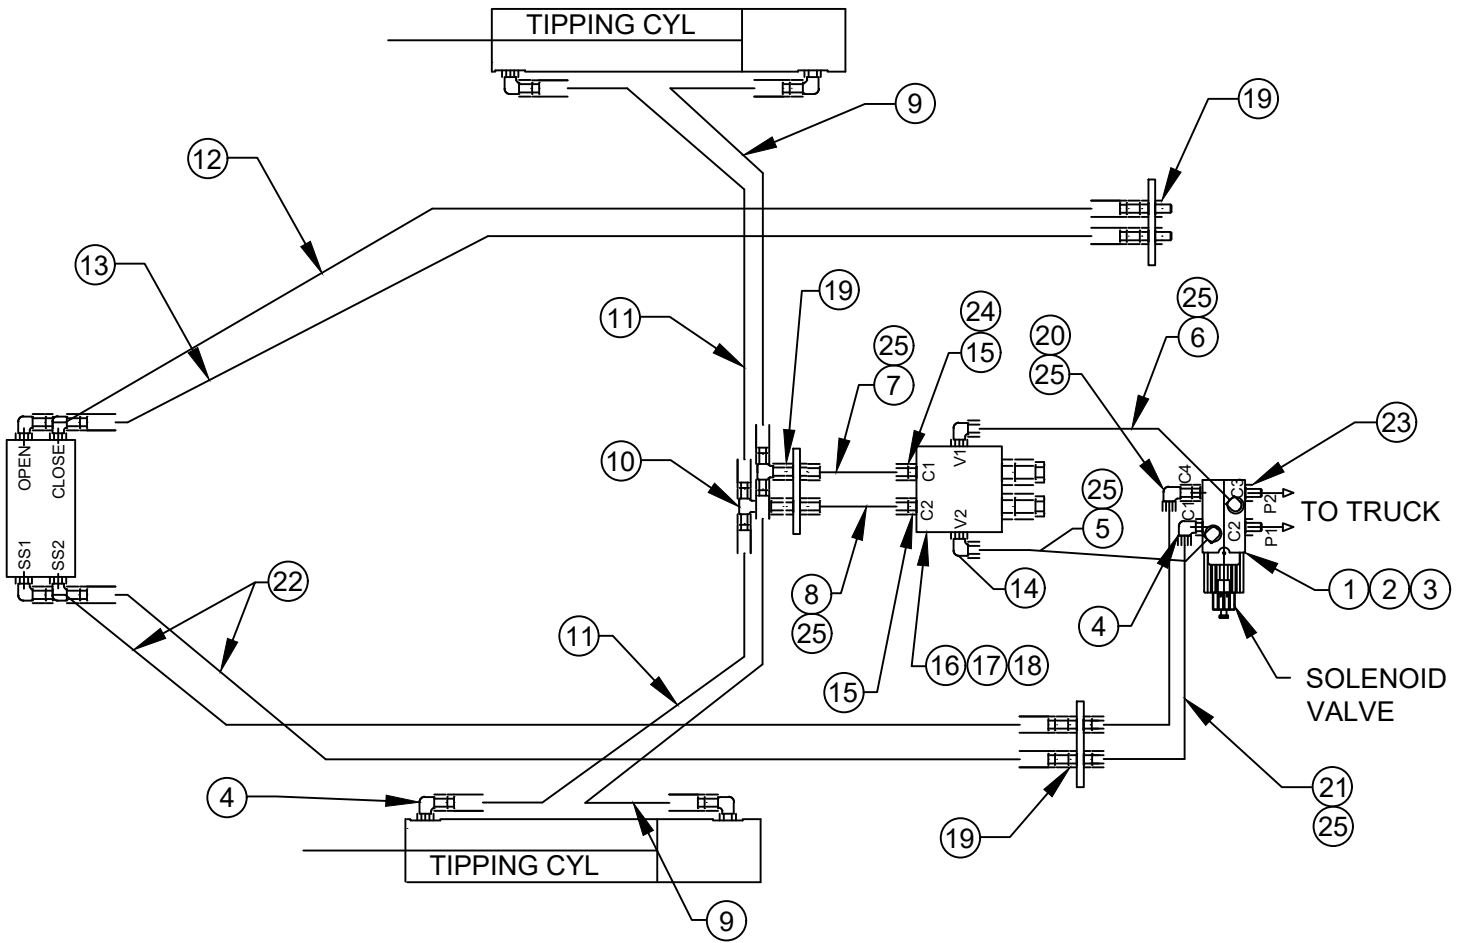


# HYDRAULIC ASSEMBLY - 3

Drawing Reference: 114232.1

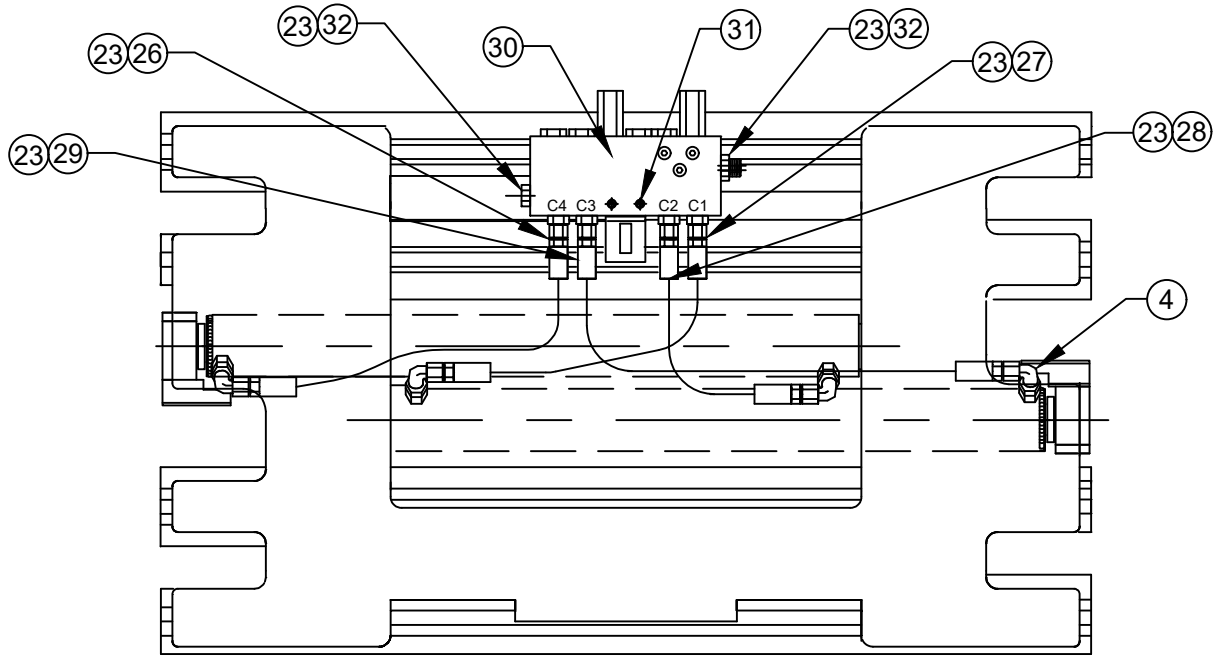


AS VIEWED FROM DRIVERS SEAT

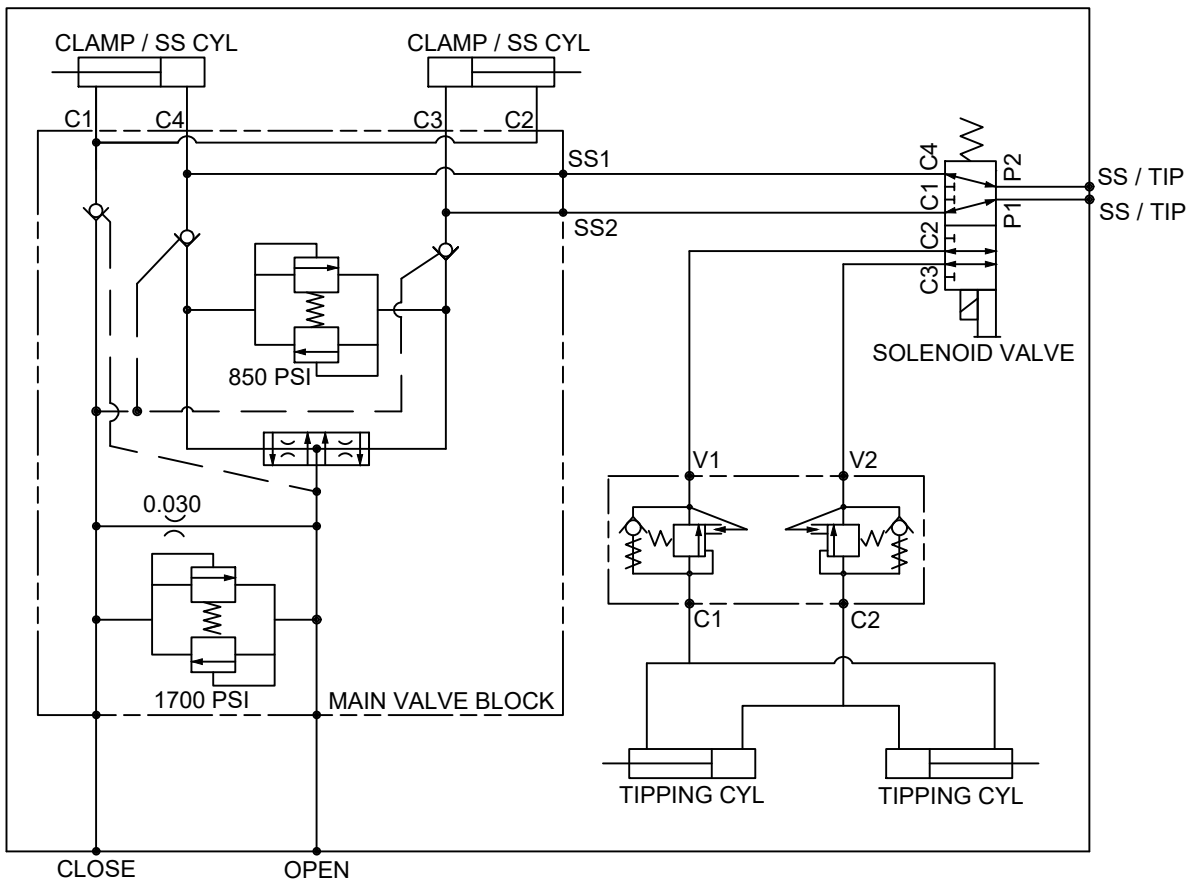



# CLAMP CYLINDER ASSEMBLY

Drawing Reference: 101251.41

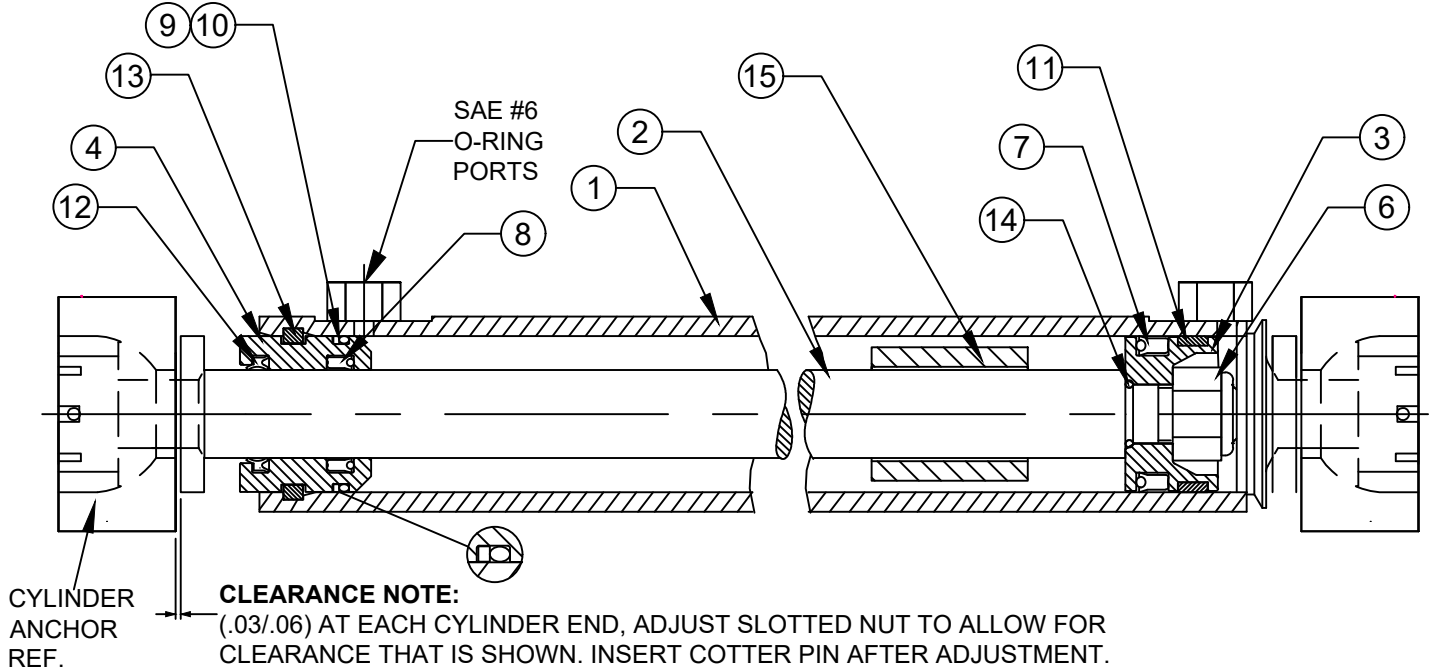


#	QTY	PART #	DESCRIPTION
1	1	101257.39	Cylinder Tube
2	1	100965.67	Rod
3	1	101256	Piston
4	1	101254	Gland
5	1	101261	Seal Kit (Items 6 thru 13)
6	1	101035	Modified ESNA Nut
7	1	100032.095	Poly Pak LSP
8	1	100031.059	Poly Pak LSP
9	1	100028.314	Back-up Ring LSP
10	1	100029.314	O-Ring LSP
11	1	101260	Wear Ring
12	1	101034.6	Wiper Ring
13	1	100027.2	Lockwire
14	1	100029.203	O-Ring LSP
15	-	-	Spacer

## CYLINDER SERVICE

- Prior to assembly lubricate seals, cylinder bore and rod with STP.
- Inspect all parts for scratches, nicks and gouges. Replace all damaged components.
- Inspect cylinder bore and rod for scoring. Replace if scored.
- Avoid damage to seal grooves. Use a dull screwdriver for seal removal.
- Torque piston nut to 200 FT-LBS.

# CARRIAGE CYLINDER ASSEMBLY - RH

Drawing Reference: 114220

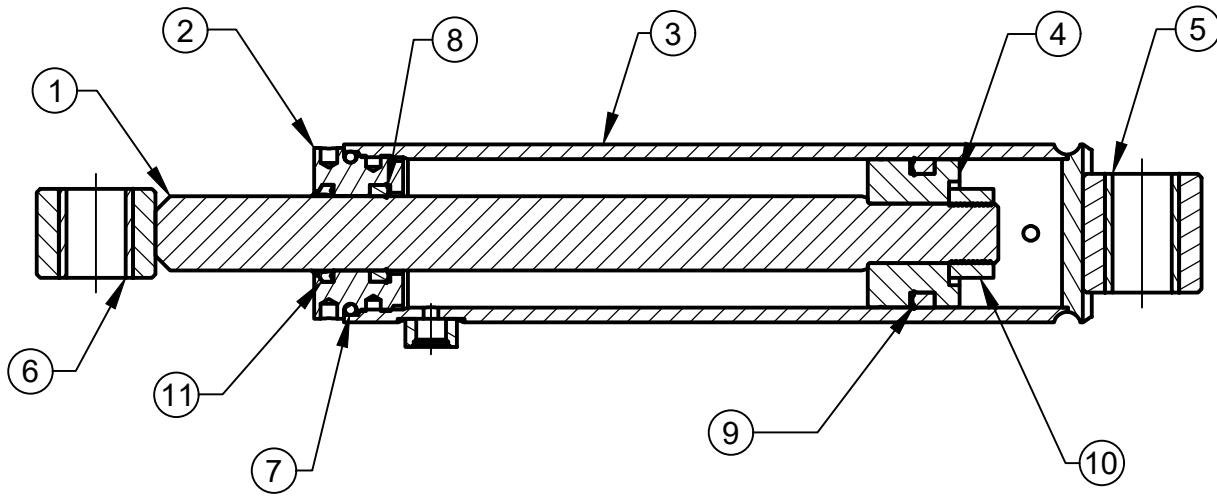


#	QTY	PART #	DESCRIPTION
1	1	109059	Rod Weldment
2	1	102242	Gland Nut
3	1	114222	Tube Weldment
4	1	109061	Piston
5	1	100785.2	Bushing
6	1	100785.3	Bushing
-	1	109271	Seal Kit (Items 7-11)
7	1	100029.10	O-Ring LSP
8	1	100031.5	Polypak BS LSP
9	1	100032.14	Polypak Seal LSP
10	1	109322	Modified Self-locking Nut LSP
11	1	103208.4	Wiper Ring LSP

## CYLINDER SERVICE

- Prior to assembly lubricate seals, cylinder bore and rod with STP.
- Inspect all parts for scratches, nicks and gouges. Replace all damaged components.
- Inspect cylinder bore and rod for scoring. Replace if scored.
- Avoid damage to seal grooves. Use a dull screwdriver for seal removal.
- Torque piston nut to 350 FT-LBS.

# CARRIAGE CYLINDER ASSEMBLY - LH

Drawing Reference: 114221

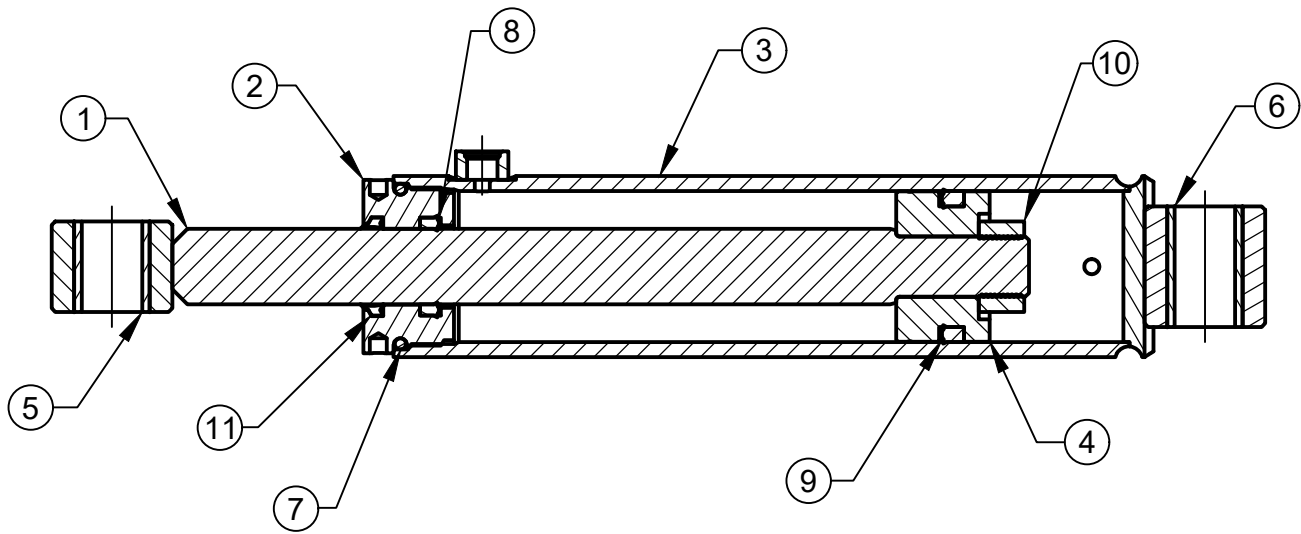




#	QTY	PART #	DESCRIPTION
1	1	109059	Rod Weldment
2	1	102242	Gland Nut
3	1	114223	Tube Weldment
4	1	109061	Piston
5	1	100785.2	Bushing
6	1	100785.3	Bushing
-	1	109271	Seal Kit (Items 7-11)
7	1	100029.10	O-Ring LSP
8	1	100031.5	Polypak BS LSP
9	1	100032.14	Polypak Seal LSP
10	1	109322	Modified Self-locking Nut LSP
11	1	103208.4	Wiper Ring LSP

## CYLINDER SERVICE


- Prior to assembly lubricate seals, cylinder bore and rod with STP.
- Inspect all parts for scratches, nicks and gouges. Replace all damaged components.
- Inspect cylinder bore and rod for scoring. Replace if scored.
- Avoid damage to seal grooves. Use a dull screwdriver for seal removal.
- Torque piston nut to 350 FT-LBS.

# CLAMP CONTROL VALVE


Drawing Reference: 100011

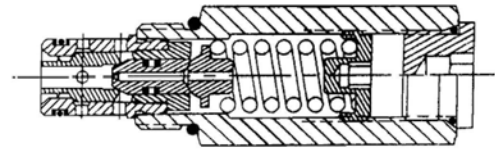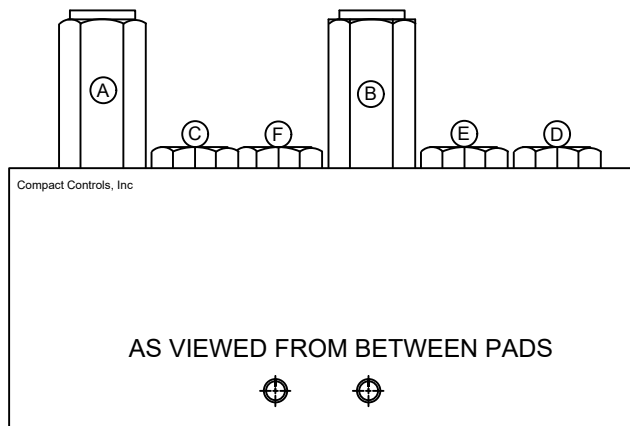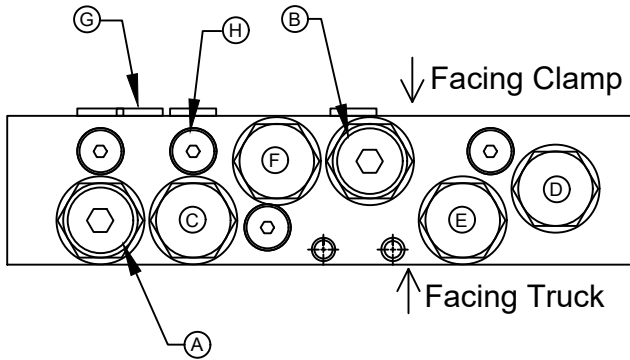

**(B) 103815 BIDIRECTIONAL RELIEF**  
**(A) 103815.1 BIDIRECTIONAL RELIEF**  
 TORQUE TO 35-40 FT/LBS  
 104716 SEAL KIT

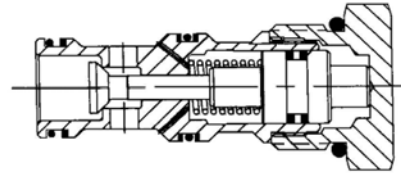

**(D, E, F) 103814 P.O. CHECK VALVE**  
 TORQUE 35-40 FT/LBS  
 104715 SEAL KIT

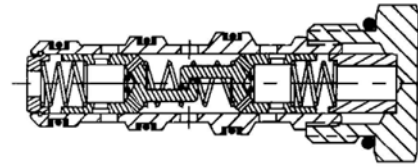


**(C) 103813 FLOW DIVIDER**  
 TORQUE 10-12 FT/LBS  
 104711 SEAL KIT

**NOTE:**

Lubricate threads & seals prior to assembly.  
 Side Shifting Ports plugged for Non-Side Shift

ID	QTY	PART #	DESCRIPTION
A	1	103815.1	Bi-Directional Relief Cartridge
B	1	103815	Bi-Directional Relief Cartridge
C	1	103814	P.O. Check Valve Cartridge
D	1	103814	P.O. Check Valve Cartridge
E	1	103814	P.O. Check Valve Cartridge
F	1	103813	Flow Divider Cartridge
G	1	104721	Orifice
H	14	101419.03	SAE #4 O-Ring Plug

## HYDRAULIC SCHEMATIC

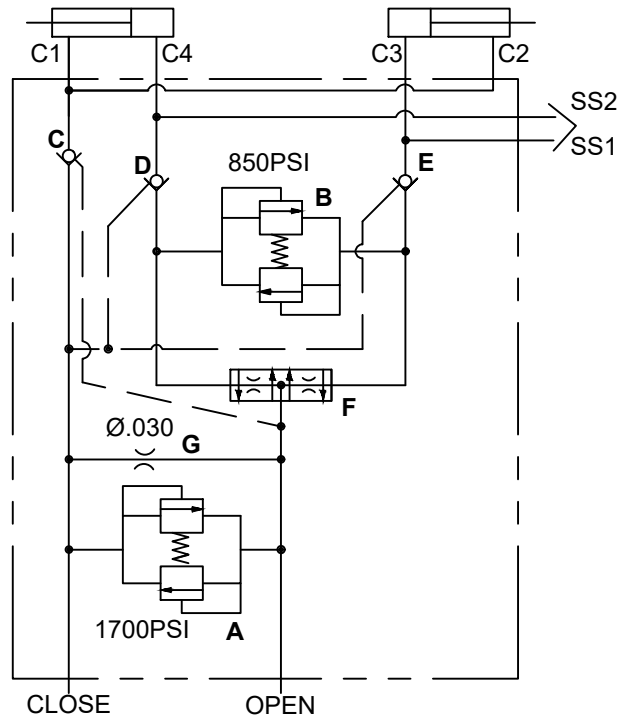

---


---

## ADJUSTING RELIEF VALVE

---

### **WARNING:**

RELEASE TRUCK PRESSURE PRIOR TO SERVICING VALVE BY TURNING THE TRUCK OFF AND "WORKING" THE SIDE SHIFT AND CLAMP FUNCTION CONTROLS.

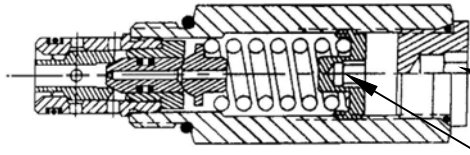

REMOVE CAP - ADJUST INTERNAL BOLT  
REPLACE CAP - PRIOR TO PRESSURIZING SYSTEM.

**DO NOT EXCEED 2000 PSI (136 BAR)**

TURN ADJUSTMENT:  
COUNTERCLOCKWISE TO DECREASE PRESSURE  
CLOCKWISE TO INCREASE PRESSURE.

---

---

---

## ADJUSTING SYSTEM PRESSURE

---

1. Release system pressure prior to servicing valve (See WARNING above).
  2. Install a hydraulic pressure gauge (2 required) that is calibrated to 5000 psi (340 bar) using a short hose and tee to be in line with both the "open" and "close" ports of the main clamp valve.
  3. Measure system pressure by deadheading the clamp in the closed position. System pressure is the difference between the pressure gauge reading of the "open" port subtracted from the pressure gauge reading of the "close" port.
  4. Repeat step one if adjusting system pressure. Remove cap of the bi-directional relief valve (refer to item A page 11) and adjust cartridge no more than one quarter turn. Replace cap prior to pressurizing system. Repeat until desired pressure setting is achieved. Do not exceed 2000 psi (136 bar) in the system pressure.
- 

---

---

## ADJUSTING BY-PASS PRESSURE

---

1. If one arm bottoms out before the other with more than 2" (51mm) difference adjustment is needed. Increase relief pressure (See above) if arms are moving independent of each other. If the lagging arm is moving slowly after first arm bottoms out, decrease relief pressure (See above).
2. To adjust by-pass relief pressure, release system pressure prior to servicing valve by turning the truck off and working the side shift and clamp function control several times.
3. Remove cap on bi-directional valve (item B page 11) and adjust cartridge no more than one quarter turn in needed direction. Replace cap prior to pressurizing system. Repeat adjustments until arms are in sync or within 2" (51mm) difference.
4. If assistance is needed in adjustments contact Loron engineering.

---


---

# ARM SLIDE & SHIM REPLACEMENT

---

---

1. To replace the slides, the arms need to be in the fully open position. Release system pressure prior to removing the arms by turning the truck off and working the side shift and clamp function controls several times.
2. Support the arm with an overhead crane or lift truck. Be sure to secure the chain or sling in a manner that prevents the arm from falling out of the chain or sling when hanging free of the clamp.
3. Remove the cotter pin, slotted nut and spherical bearing from the end of the clamp cylinder rod. Keeping hands and feet clear, and carefully slide the clamp arm off of the clamp frame.
4. Inspect slides and slide buttons for wear. Slides may be rotated end-to-end and reused if excessively worn on the outer end only. Extra shims may be used to tighten operating clearance on slightly worn slides. Replace any slides worn to less than .15" (3.8mm) thick or any slide that is deeply scored or broken.

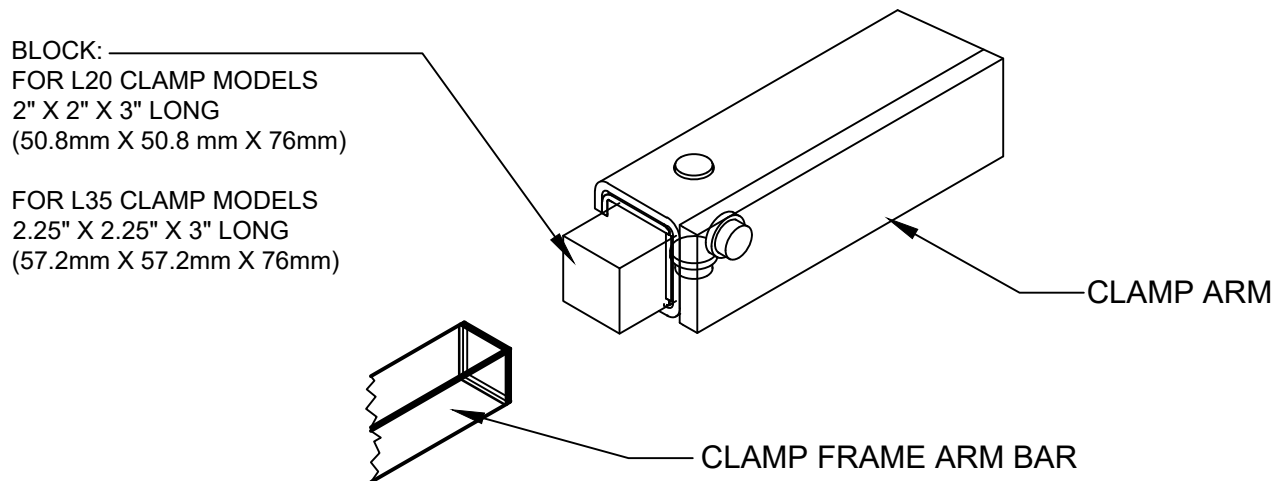

5. To aid in replacing the slides a block may be fashioned of wood or another convenient material to the dimensions shown above. The block is inserted to the end of the arm to hold the slides, shims, and buttons in position while the arm is inserted over the arm bars on the clamp frame. The block is expelled out the opposite end of the arm as the arm is pushed onto the frame. Prior to installing the arm the block may be used to determine the number of shims to place under the slides. Adjust the clearance between the slides and the block to provide approximately .06" (1.5mm) running clearance between the slides and arm when installed.
6. Keeping hands and feet clear, carefully slide the clamp arm onto the clamp frame. Be sure the arm moves freely without excessive binding. If the arm is too loose or too tight, add or remove shims as required.
7. Install the spherical bearing, slotted nut and cotter pin onto the end of the clamp cylinder rod. Be sure to leave .03"-.06" (.7mm to 1.5mm) clearance to allow the cylinder to "float" on its mountings.

---

---

# TROUBLE SHOOTING GUIDE

---

---

## LOADS SLIPPING OR DROPPING

### POSSIBLE CAUSES

### SOLUTIONS

- |  |  |
|--|--|
| 1. Valve cartridges are not sufficiently tight.                      | 1. Tighten all cartridges to torque values shown on page 11.   |
| 2. System relief pressure is set too low.                            | 2. See Adjusting System Pressure on page 12.   |
| 3. Internal leakage in cylinder.                                     | 3. Replace Cylinder seals. If tube, piston or rod is scored replace with new parts.                            |
| 4. Incorrect clamp pad size or load not fully engaged in clamp arms. | 4. Be sure the clamp pads are correctly sized for the load and the load is positioned fully in the clamp arms. |
| 5. Pad camber is set incorrectly.                                    | 5. Shim pads to change camber.   |
| 6. Load too heavy for clamp capacity.                                | 6. Consult factory.  |
| 7. Load may not be stacked correctly or may need to be unitized.     | 7. Re-stack or unitize load (shrink wrap).   |
| 8. Bent arms or contact pads.  | 8. Consult factory.  |

## CRUSHING LOADS

### POSSIBLE CAUSES

### SOLUTIONS

- |  |  |
|--|--|
| 1. System relief pressure is set too high.                   | 1. See Adjusting System Pressure page 12.  |
| 2. Operator over-working (milking) control valve.            | 2. Once the pad contacts the load, clamp the load in one even motion - do not over-work the valve.           |
| 3. Bent arms or contact pads.                                | 3. Consult factory.  |
| 4. Pad camber is set incorrectly.                            | 4. Shim pads to change the camber.   |
| 5. Variable loads that require different clamping pressures. | 5. Install a 4-position pressure regulator on truck cowl - consult factory for part number and availability. |